


An analysis of the applicability of blockchain to secure IP addresses allocation, delegation and bindings

<https://datatracker.ietf.org/doc/draft-paillisse-sidrops-blockchain/>

ICANN 60 - Abu Dhabi
October 2017

Jordi Paillissé, Albert Cabellos, Vina Ermagan, Alberto Rodríguez,
Fabio Maino
jordip@ac.upc.edu



**OPEN
OVERLAY
ROUTER**

<http://openoverlayrouter.org>

Consensus algorithms

Consensus algorithm

- Central part of blockchains
- Controls addition of blocks
- Defines what is consensus
- Most common:
 - Proof of Work, e.g. Bitcoin
 - Proof of Stake, e.g. Ethereum (planned)


Proof of Work

- Perform a large number of calculations
- Eg: find nonce so that:

SHA-256 (transactions +
hash (prev. Block) +
nonce) = 00000000xxxxxxxxxxxxxxxx

Bruteforce!! ←

- Change data → redo Proof of Work
- Accumulate computing power

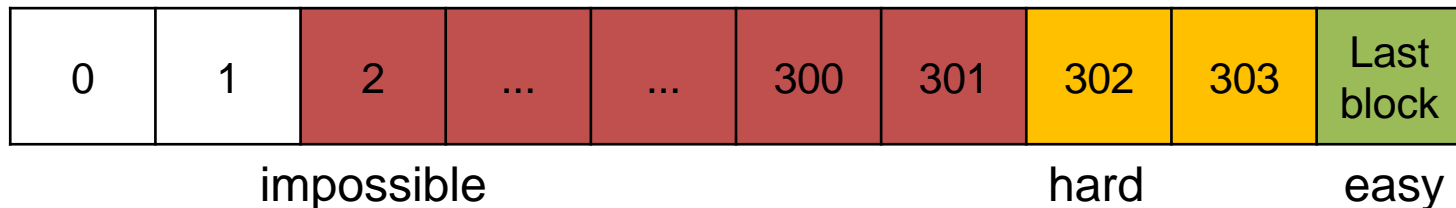


- Not necessarily performed by the users of the blockchain

Proof of Stake


- Any owner of tokens can add a block
- Selected randomly
- Users with more tokens are more likely to be selected
 - Reduced incentive to attack (because they use the blockchain)
- Attacks are different than PoW

Proof of Stake

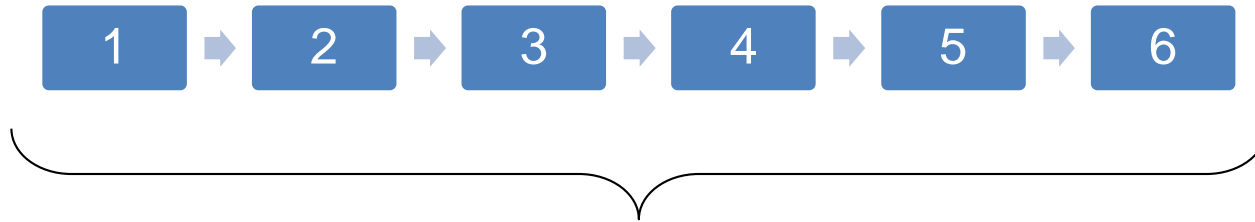


List all stake

Holder	# tokens
A	124
E	110
B	87
D	75
F	54
C	3



Proof of Stake

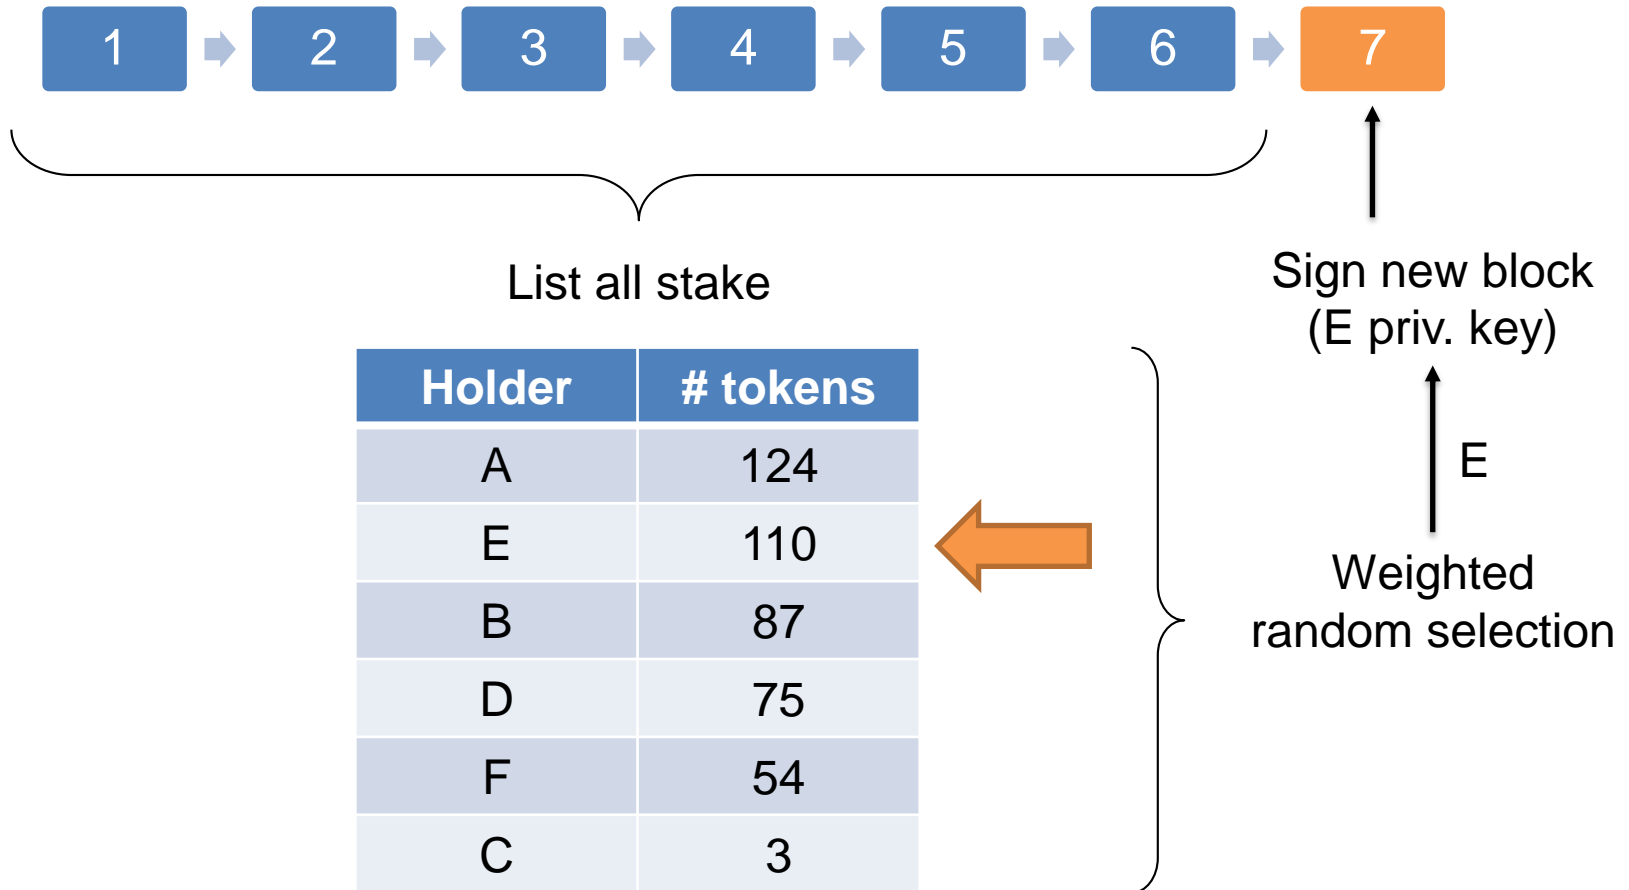

Summary of features

vs. traditional PKI systems

Advantages

- Decentralized
- No CAs
- Simplified management
- Simple rekeying

Summary of features

vs. traditional PKI systems

Advantages

- Decentralized
- No CAs
- Simplified management
- Simple rekeying
- Limited prior trust
- Auditable
- Censorship-resistant

Summary of features

vs. traditional PKI systems

Advantages

- Decentralized
- No CAs
- Simplified management
- Simple rekeying
- Limited prior trust
- Auditable
- Censorship-resistant

Drawbacks

- No crypto guarantees
- Large storage
- Costly bootstrapping

Summary of features


vs. traditional PKI systems

Advantages

- Decentralized
- No CAs
- Simplified management
- Simple rekeying
- Limited prior trust
- Auditable
- Censorship-resistant

Drawbacks

- No crypto guarantees
- Large storage
- Costly bootstrapping

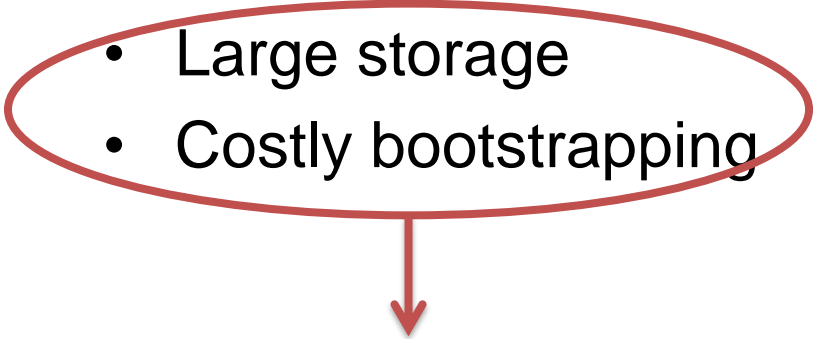


Can be mitigated
with a dedicated
blockchain

Blockchain for IP addresses

Data in the blockchain

We want to store:

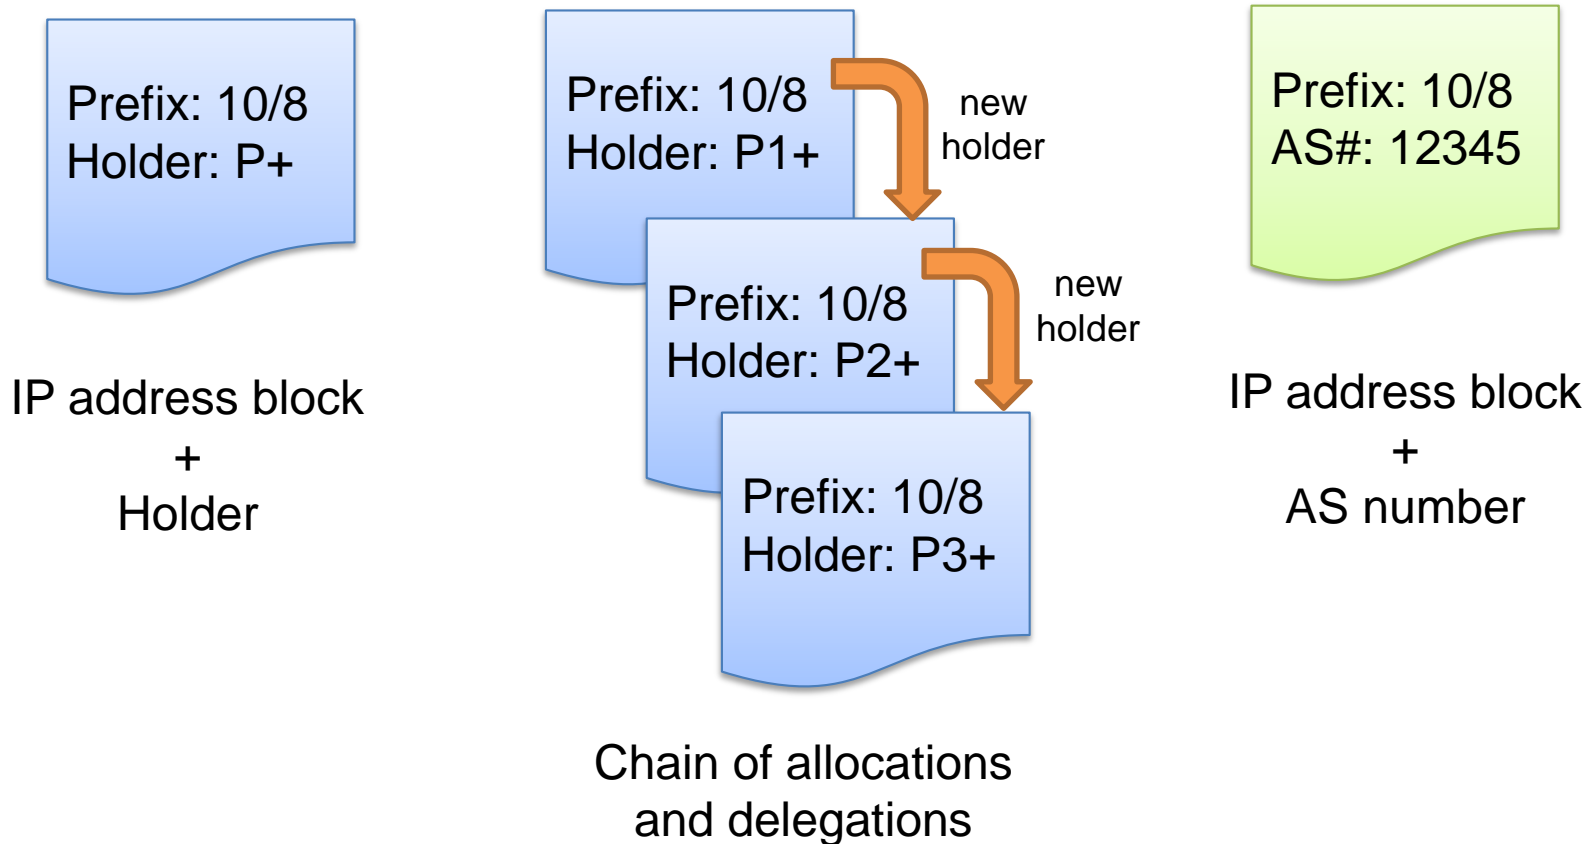

IP addresses vs. coins

- IP addresses = coins
- Similar properties:
 - Unique
 - Transferrable
 - Divisible
- Exchange blocks of IP addresses just like coins

Which consensus algorithm?

- PoW presents some drawbacks:
 - Parties that add blocks do not necessarily use the blockchain
 - Takeover if enough computing power
 - Hardware dependency →
 - Energy inefficiency

AntMiner S7



Advertised Capacity:

4.73 Th/s

Power Efficiency:

0.25 W/Gh

Weight:


8.8 pounds

Guide:

Yes

Price:

\$479.95



Appx. BTC Earned Per

Month:

0.1645

Which consensus algorithm?

- PoS appears to be more suitable for this scenario:
 - No special hardware
 - No expensive computations
 - Parties with more IP addresses control the blockchain
 - Users of the blockchain maintain it

Why Proof of Stake?

- PoS appears to be more suitable for this scenario:
 - Takeover requires accumulating a large amount of IP blocks
 - Participants do not have an incentive to sell IP blocks to an attacker

Example


Allocation


From: IANA
To: IANA
I have all prefixes





blockchain


0	1	2	3	4	5	6	7	...	n	n+1	n+2
---	---	---	---	---	---	---	---	-----	---	-----	-----

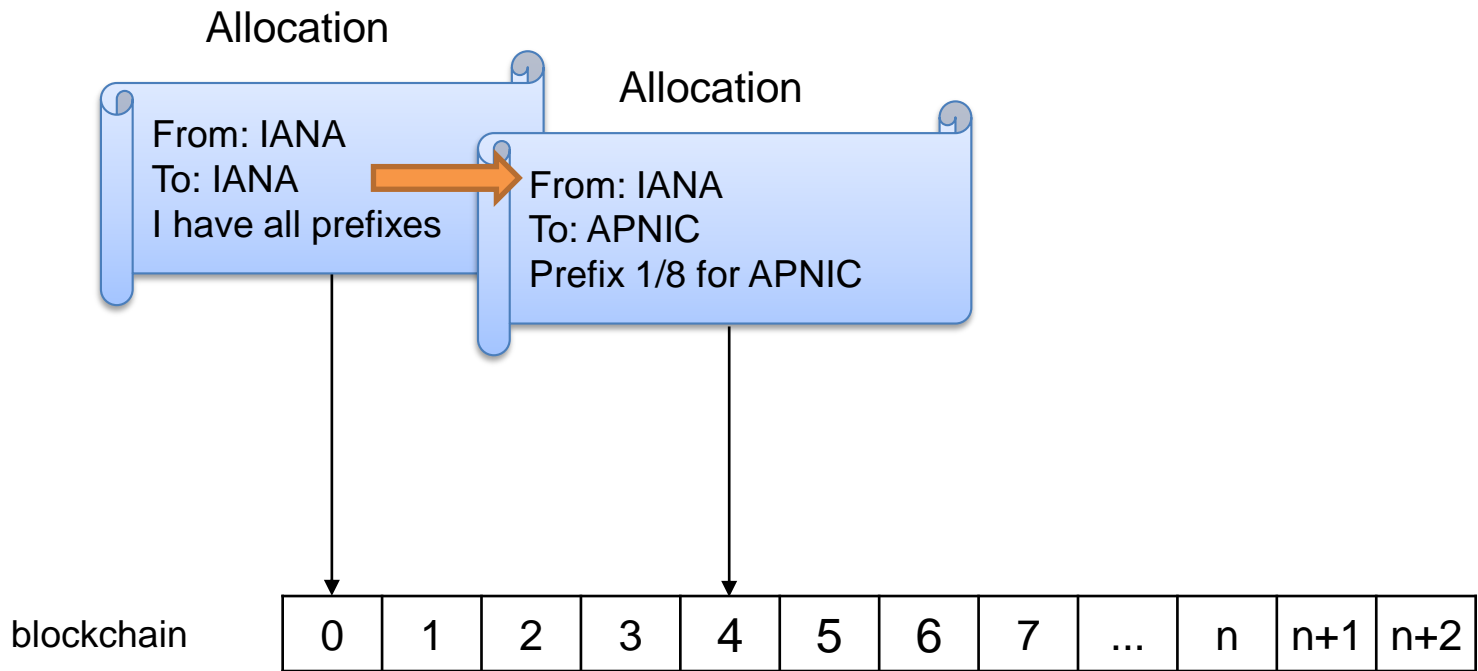

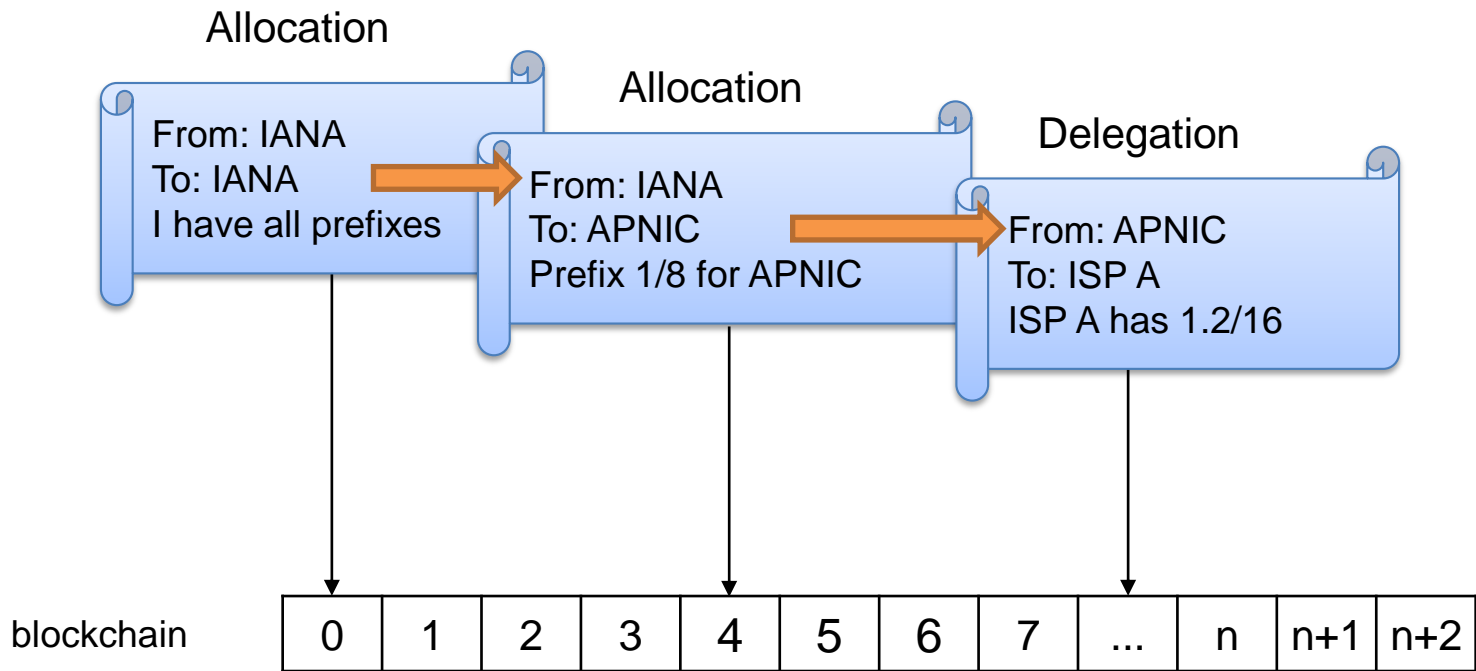

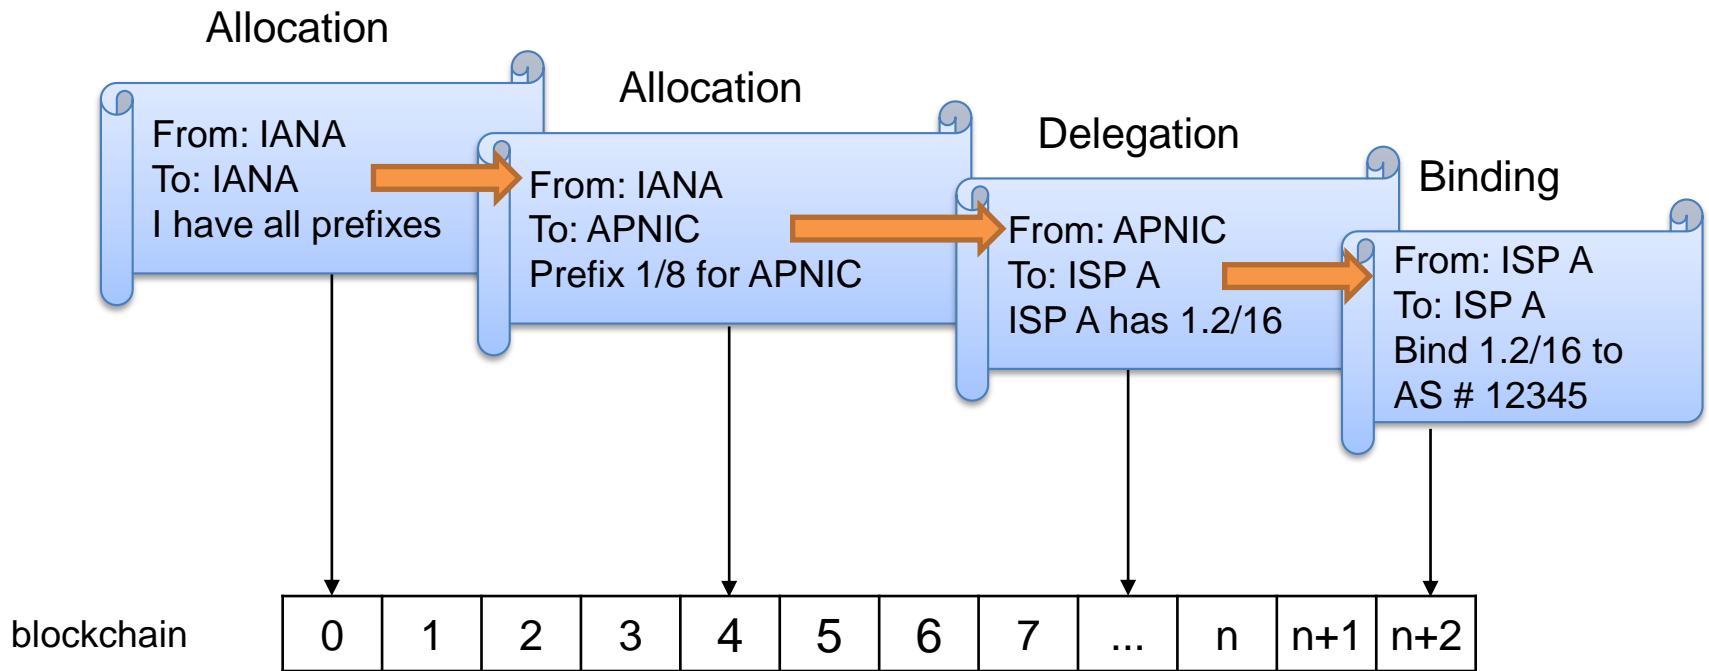

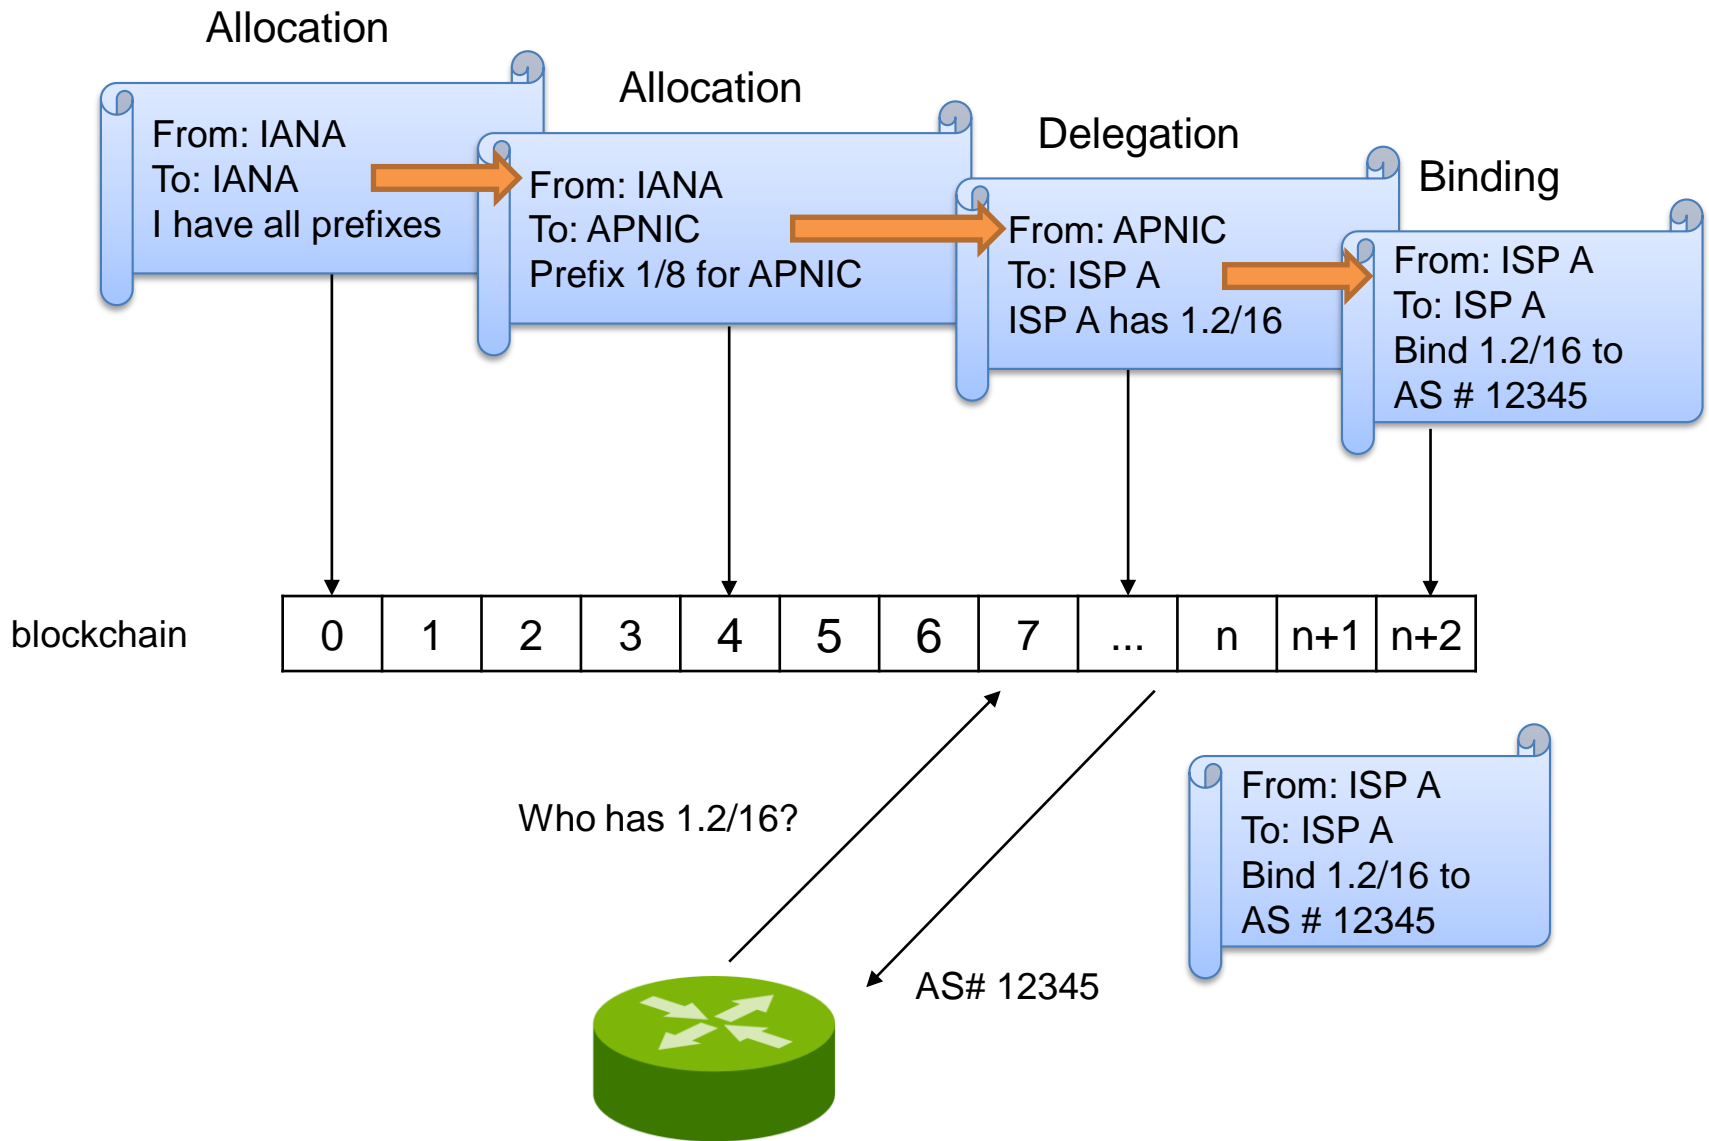

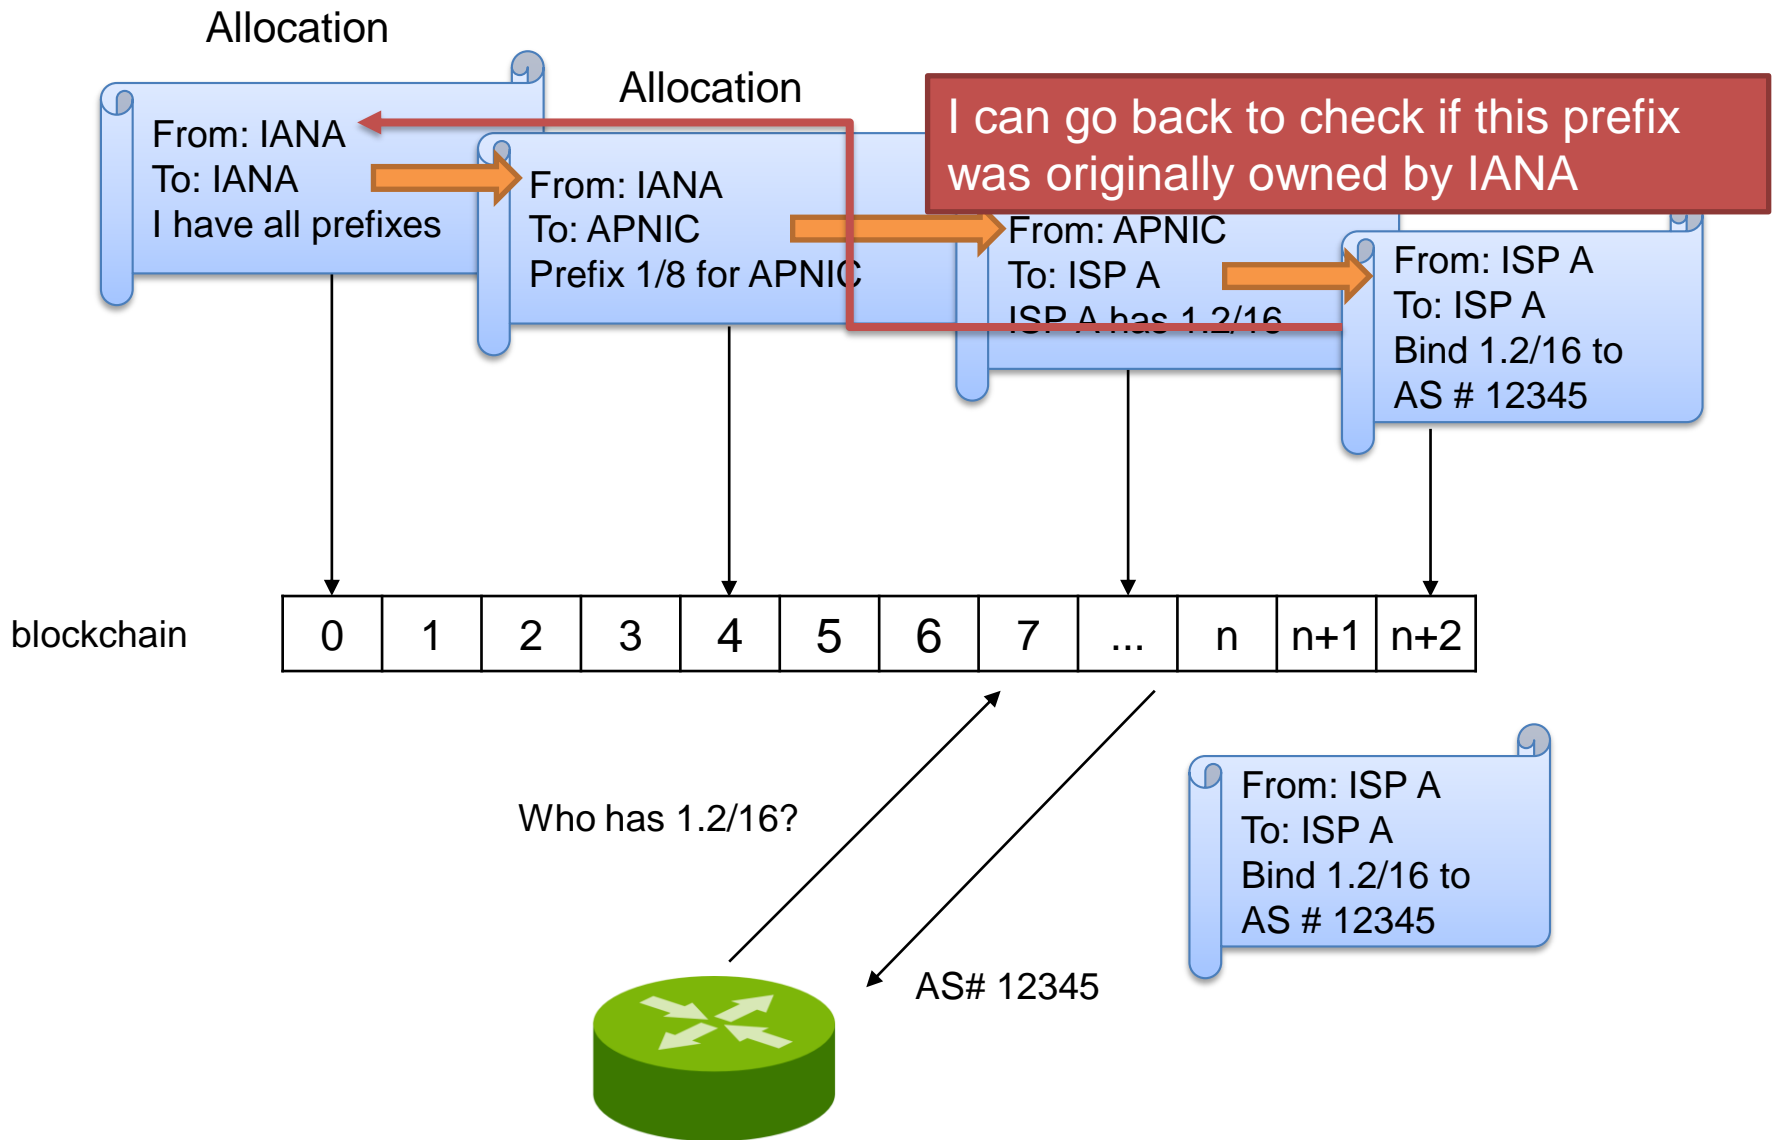

And for naming systems?

Thoughts for DNS applications

- Scalability: domain names are (nearly) infinite → specific blockchain for DNS
- Consensus algorithm: PoS viable, careful definition of stakeholders:
 - DNS companies?
 - Other Internet companies?
 - Any domain holder?

Thoughts for DNS applications


- Built-in currency? Not only a technical issue
- Smart contracts to automate tasks
- DNS blockchain → DNS rules

Thanks for listening!

Revocation

- Fundamental trade-off: ability to revoke vs. amount of trust
- Expiration time
- Multi-signature transactions
- Revocation transaction
- Hard fork

Simple




Complex

Storage

- Several mechanisms can help reducing storage, eg:
 - Prune old transactions
 - Download only headers (Bitcoin SPV*)
 - Discard old blocks
- These techniques depend on the consensus algorithm

Scalability

Blockchain size estimation

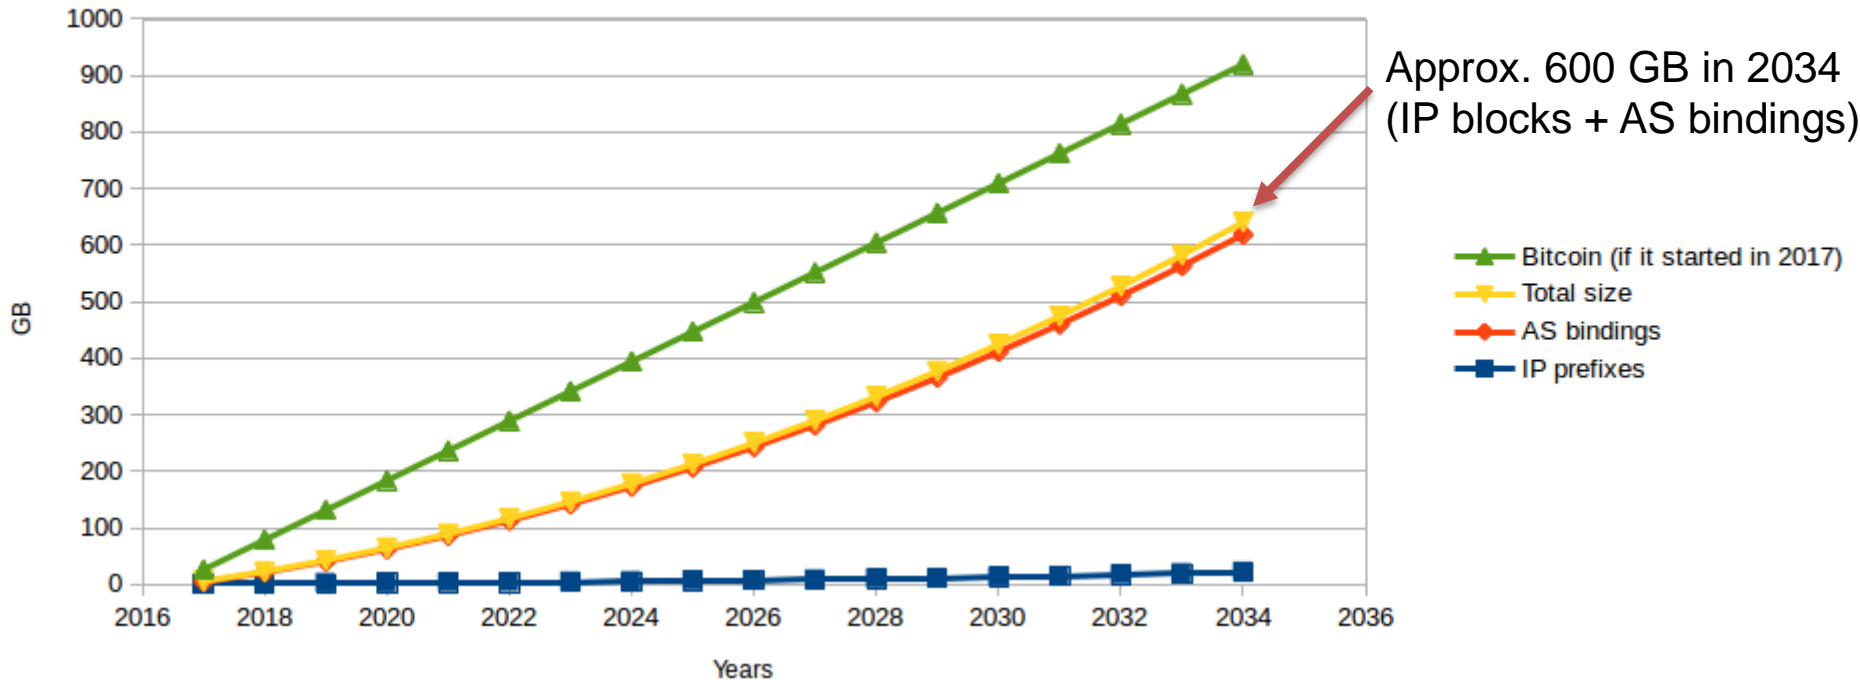


- One AS <> prefix binding for each block of /24 IPv4 address space
- Growth similar to BGP churn*
- Each transaction approx. 400 bytes
- Only IP Prefixes: worst case + BGP table growth*: approx. 40 GB in 20 years
- With PoS, storage can be reduced

*Source: <http://www.potaroo.net/ispcol/2017-01/bgp2016.html>

Transaction examples


First transaction

- Users trust the Public Key of the Root, that initially claims all address space by writing the genesis block
- Root can delegate all address space to itself and use a different keypair

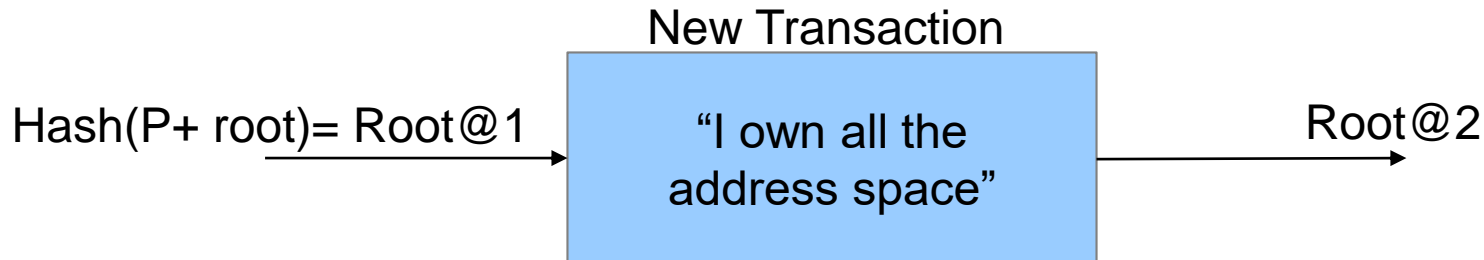


Prefix allocation and delegation

- Root allocates blocks of addresses to other entities (identified by Hash(Public Key)) by adding transactions

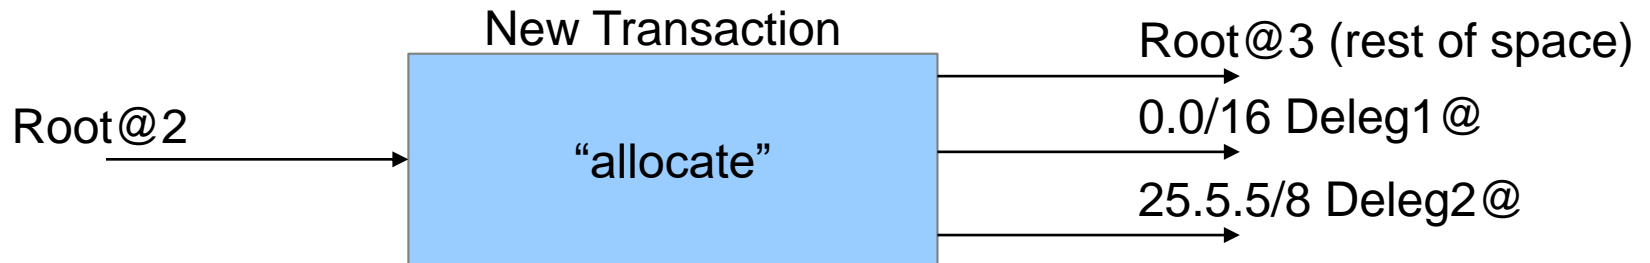


- Holders can further delegate address blocks to other entities

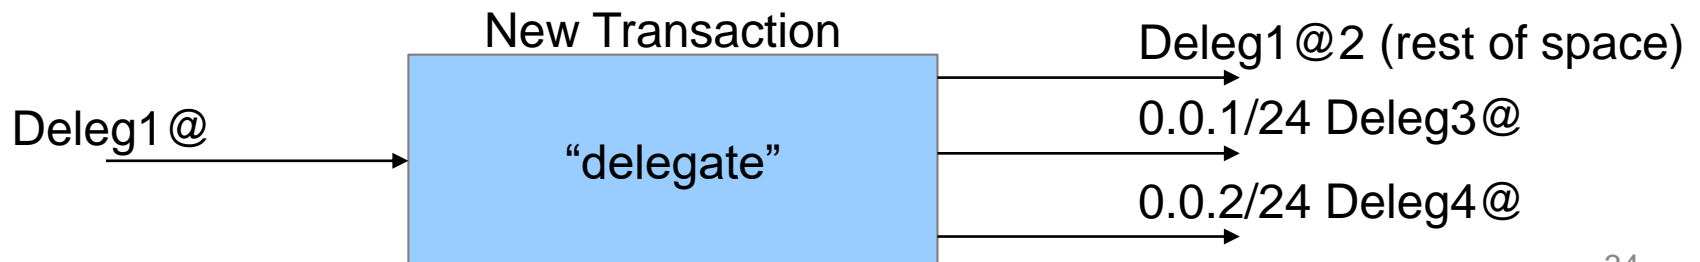

Writing AS bindings

- Just like delegating a prefix, but instead of the new holder, we write the binding

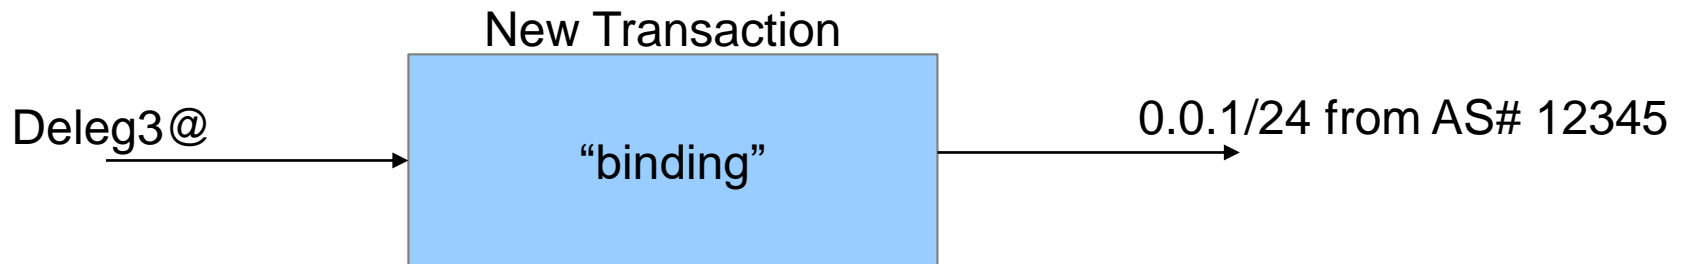

Rekeying

- Delegating the block of addresses to itself using a new key set.
- Simpler than traditional rekeying schemes
- Can be performed independently, i.e. each holder can do it without affecting other holder
- Same procedure for AS number bindings

External server authentication

- Some information may not be suitable for the blockchain, or changes so fast it is already outdated when added into a block
- A public key from an external server can also be included in the delegations
- Since blockchain provides authentication and integrity for this key, parties can use it to authenticate responses from the external server

FAQ

- Does it grow indefinitely?
 - Yes
- Do all nodes have the same information?
 - Yes
- When answering a query, do you have to search the entire blockchain?
 - No, you can create a separate data structure only with the current data
- If I lose my private key, do I lose my prefixes also?
 - Yes, watch out!