

ICANN COMMUNITY FORUM 61

SAN JUAN

10-15 March 2018



Agenda

- What is DNS Abuse? DNS Misuse?
- Examples of DNS Abuse or Misuse
- Evolving DNS Threat Landscape
- Abuse in an ICANN Context



What is DNS Abuse?

- No globally accepted definition exists, but definitional variants include
 - Cyber crime
 - Hacking
 - Malicious conduct
- Threats to the DNS fall under three categories:
 - o data corruption, denial of service, and privacy.
- DNS misuse is distinguished from DNS Abuse
 - Misuse refers to intentionally deceptive, conniving, or unsolicited activities that actively make use of the the DNS and/or the procedures used to register or resolve domain names.



Keep It Simple

In simpler terms "DNS abuse" refers to anything that attacks or abuses the DNS infrastructure,

or

DNS misuse refers to exploiting the DNS protocol or the domain name registration processes for malicious purposes.



Why Is the DNS a Target for Attacks

- Everyone uses the DNS to resolve user friendly names to Internet Protocol addresses
- Disrupt the DNS and you disrupt e-merchant transactions, government services, e-learning, or social engagement
- Exploit the DNS and you can trick, defraud or deceive users
- Vectors for exploitation
 - Maliciously register domain names
 - Hijack name resolution or name registration services
 - Corrupt DNS data



All of the operational elements of the DNS are targets for attacks



- Authoritative Name Servers host zone data
 - The set of "DNS data" that the registrant publishes
- Recursive Name Resolvers ("resolvers")
 - Systems that find answers to queries for DNS data
 - Caching resolvers find and store answers locally for "TTL" period of time
- Client or "stub" resolvers
 - Software in applications, mobile apps or operating systems that query the DNS and process responses



What elements of the DNS are targeted and how?

Target	Authoritative Name Server	Recursive Resolver	Stub Resolver
Access bandwidth	✓	✓	V
Access network elements	✓	✓	✓
NS or device:			
Hardware	✓	✓	✓
OS software	V	/	V
Name server software	✓	✓	
Cache		✓	V
Application software			V
Administration	✓	✓	V
Configuration	✓	✓	V



Agenda

- What is DNS Abuse? DNS Misuse?
- Examples of DNS Abuse or Misuse
- Evolving DNS Threat Landscape
- Abuse in an ICANN Context



Attacks Against Name Servers or Recursors

- "Exploit to own" DOS attack
- Reflection attack
- Amplification attack
- Distributed Reflection and Amplification DOS attack


Enablers for...

- (Host) Resource Depletion Attack
- Cache Poisoning or Exhaustion attacks
- DNS Man-in-the-Middle attack

Let's look at some examples




Distributed reflection and amplification attack (DDoS)

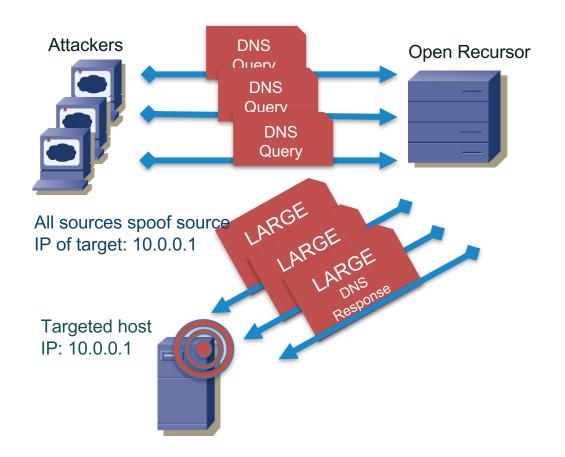

- Launch reflection and amplification attack from 1000s of origins
- Reflect through open recursor
- Deliver 1000s of large responses to target



(Host) Resource Depletion DOS attack

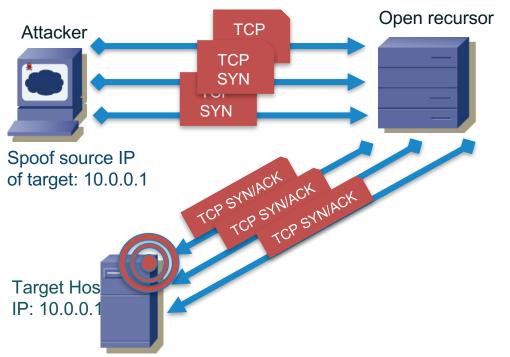

- Attacker sends flood of DNS messages over TCP from spoofed IP address of target
- Name server allocates resources for TCP connections until resources are exhausted
- Name resolution is degraded or interrupted




Poisoning a Cache

 Attacker launches a spam campaign where spam message contains

http://loseweightfastnow.com

- Attacker's name server will respond to a DNS query for loseweightnow.com with malicious data about ebay.com
- Vulnerable resolvers ad malicious data to local caches
- The malicious data will send victims to an eBay phishing site for the lifetime of the cached entry

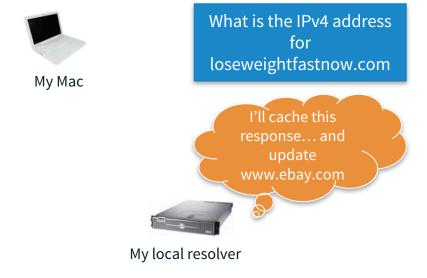

loseweightfastnow.com IPv4 address is 192.168.1.1 **ALSO** www.ebay.com is at 192.168.1.2



ecrime name server




Poisoning a host (DNSChanger)

Attacker distributes DNS configuration altering malware via

Spam, drive-by download...

DNSChanger malware

- Alters DNS configuration of infected PC
- Causes all requests to go to a malicious name server run by attackers
- Attacker updates malware to redirect web traffic to a destination of his choosing

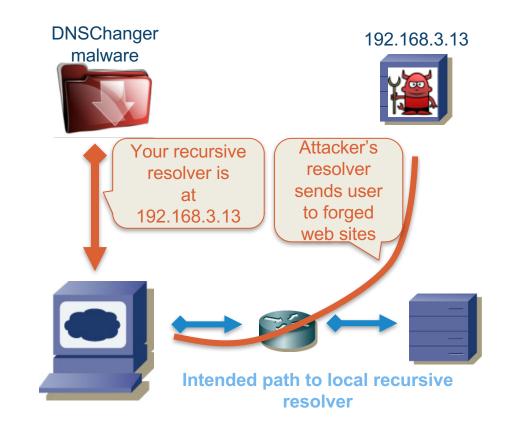




DNS protocol and registration system misuse

- Domain name registration hijacking, DNS hijacking
- DNS protocol as a Covert Exfiltration Channel
- DNS protocol as a Covert Malware Channel
- Fast Flux

Let's look at some examples



Domain name registrations are sweet targets for attacks

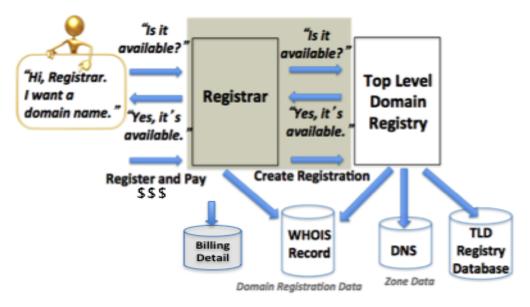

How to register a gTLD domain:

- 1. Choose a string e.g., example
- 2. Visit a registrar to check string availability
- 3. Pay a fee to register the name
- 4. Submit registration information

Registrar and registries manage:

- "string" + TLD (managed in registry DB)
- Contacts, DNS (managed in Whois)
- DNS, status (managed in Whois DBs)
- Payment information

Process is automated, rapidly provisioned.

Correspondence is largely email
Inexpensive registrations are plentiful...

Good for consumers, good for attackers, too



Why do attackers and criminals register domain names?



Register names, sometimes in volume to host

- Phishing (fraud) pages
- Ransomware payment web pages
- Malware distribution sites
- Scam sites (advance fee fraud, reshipping etc.)
- Counterfeit goods sites
- Illegal pharmaceutical or piracy sites

Domain names also play roles in criminal DNS Infrastructures

- Name server names for ecrime name resolution
- Names for command-control administration for botnet




Hijacking (theft) is another way that attackers acquire domain names

Why pay if you can crack?

- Attacker gains control of a domain registrar or registry customer account
 - Social engineering
 - Phishing attack
 - Data breach
- Attacker modifies/adds name server record for domain
 - NS record that is published in TLD zone associates domain's name server with IP address of attacker's host
- Attacker publishes "attack" zone data
 - Resource records in zone data support phishing, fraud, or defacement sites, spam mail exchanges, VoIP servers...



Criminals exploit registrar email correspondence (Phishing)

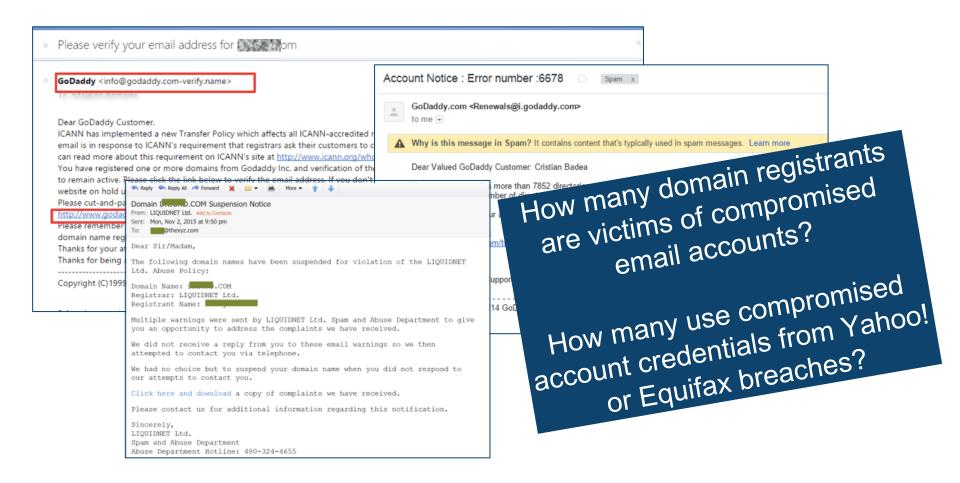




Using the DNS to evade, obfuscate, and make networks agile

Fast flux

- Attacker associates IP address with a web proxy or name server for short time to live (TTL)
- Attacker changes IP of host or name server at low TTL frequency to thwart investigators


Double (fast) flux

 Apply fast flux technique to both web proxy and name server

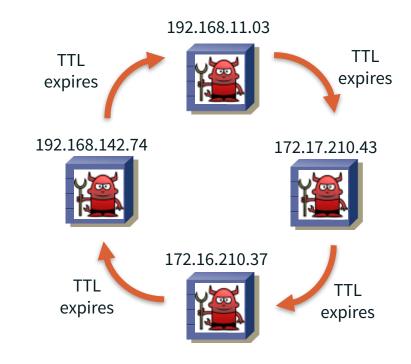




DNS as a Covert Exfiltration Channel

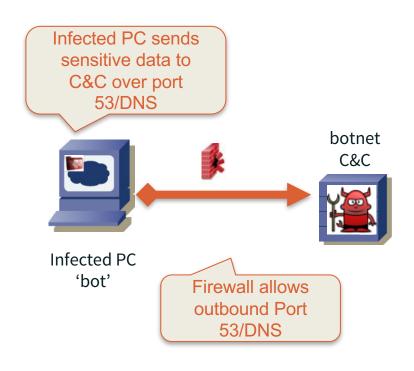

- DNS messages
 manipulated to forward
 sensitive data from
 infected PC through
 firewall to botnet command
 and control (C&C)
- Proof of concept: exfiltrate results of SQL injection attacks



DNS as a Covert Malware Channel

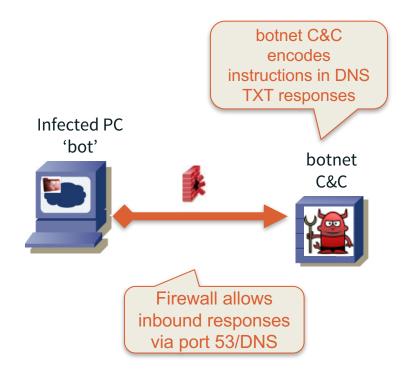

- Malware on infected PC performs TXT lookups to botnet C&C
- TXT responses contain instructions for bot
- Examples in wild:
 - Feederbot
 - Morto



Agenda

- What is DNS Abuse? DNS Misuse?
- Examples of DNS Abuse or Misuse
- Evolving DNS Threat Landscape
- Abuse in an ICANN Context



The outlook gets grimmer and grimmer, every day...


- More and better botnets
 - DDoS as a Service?
 - Fast-flux, double-flux redux!
 - Spam as a cloud service
 - Example: Avalanche malware and DNS hosting infrastructure
- Internet of Vulnerable Things
 - Botnet recruitment to next level
 - Example: Mirai malware capable of IP, TCP, UDP, DNS volumetric attacks
- DNS: "Ignition key" or "kill switch" for emerging class of attacks?
 - Example: Wannacry, Wannacrypt



https://www.flickr.com/photos/roach/



Do you really wannacry? DDoS Kits and Services

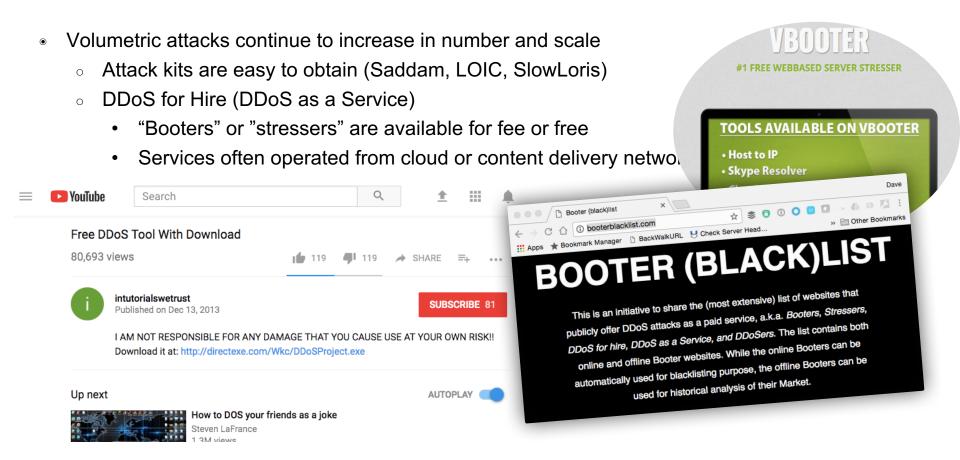




Avalanche malware and DNS hosting infrastructure

- Criminal malware and DNS hosting infrastructure
 - Evolved from botnet to malware delivery service
 - Bulletproof hosting used double fast-flux
 - Predominantly used for financial fraud attacks
- Avalanche offered a "cloud customer experience"
 - Criminal domain registrations
 - Access to a C2 server and service assets (bots)
 - Choice of Malware: 20 families available

Andromeda	Nymaim	Carberp	KBot / Bolek	Panda Banker
CoreBot	Ranbyus (.tw)	Doc-Downloader	Rovnix	Dofoil
Slempo	GOZI2	Teslacrypt	GozNym	Trusteer App
KINS	URLZone	Marcher	VawtrakMatsn	Xswkit
			u	



Avalanche Timeline

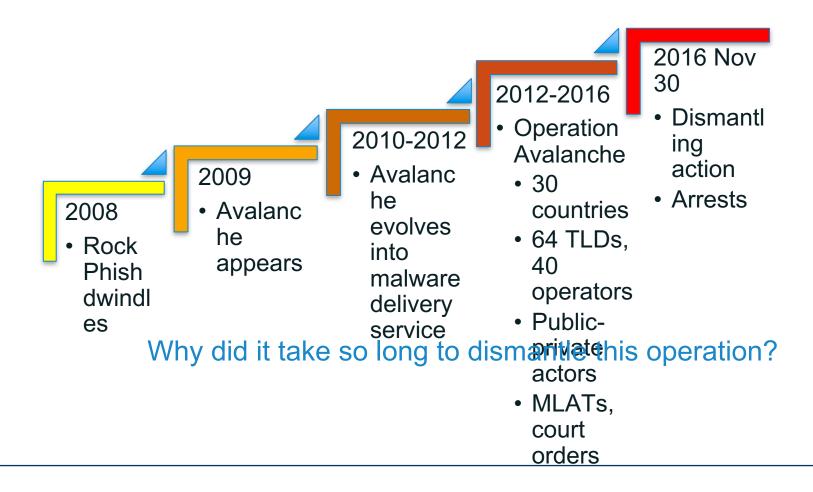



Attackers operate at Internet pace

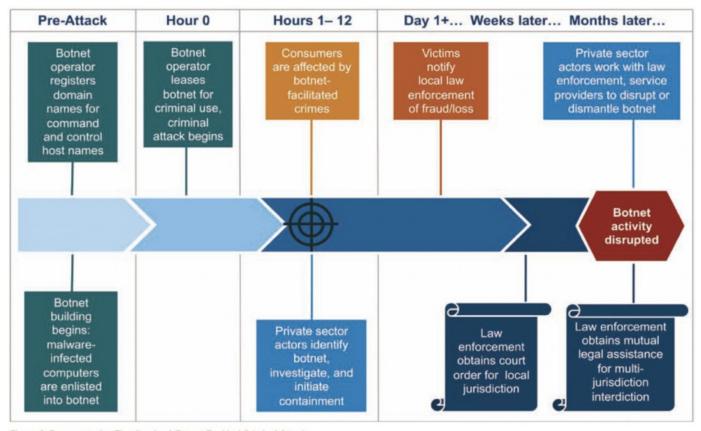


Figure 2. Representative Timeline for A Botnet-Enabled Criminal Attack



Avalanche Outcome





Mirai: A Lesson in Not Learning from Our History "Those who cannot remember the past are condemned to repeat it." - George Santayana

History shows that we introduce new attack vectors with each new technology wave

- New/custom OSs, streamlined software, apps
- Modifications to general purpose operating systems
- New actors: a new generation of developers who are unfamiliar with vulnerability history
- New actors fall prey to errors of prior generations of developers, e.g.,
 - Lax configurations
 - Little consideration for security or data protection




Mirai: Example of Explanation

"Vulnerable IoT devices are subsumed into the Mirai botnet by continuous automated scanning for and exploitation of well-known,hardcoded administrative credentials present in the relevant IoT devices.

These vulnerable embedded systems are typically listening for inbound telnet access on TCP/23 and TCP/2323."

Roland Dobbins, Arbor Networks

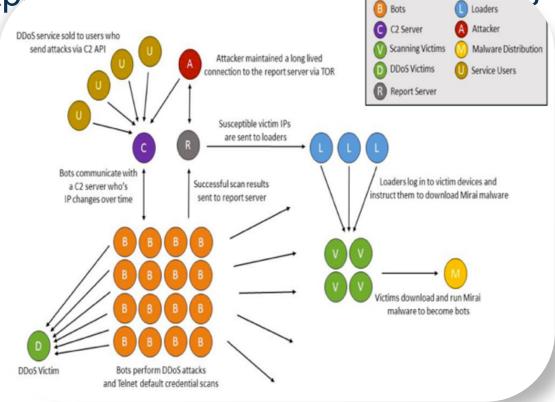

http://blog.level3.com/security/grinch-stole-iot/ https://www.arbornetworks.com/blog/asert/mirai-iot-botnet-description-ddos-attack-mitigation/




Warning bells Mirai rings for us all

- Mirai characteristics expose many IoT security issues
 - A botnet that is largely comprised of IoT devices
 - The compromised devices use plain text channels that have long been regarded as unsecured and removed from use in previous waves of technology
 - The default credentials for these services are known and shared
 - The devices can be re-purposed for many kinds of attacks
- An IoT-populated botnet: DDOS as a service to a new level



Wannacry, Wannacrypt Ransomware

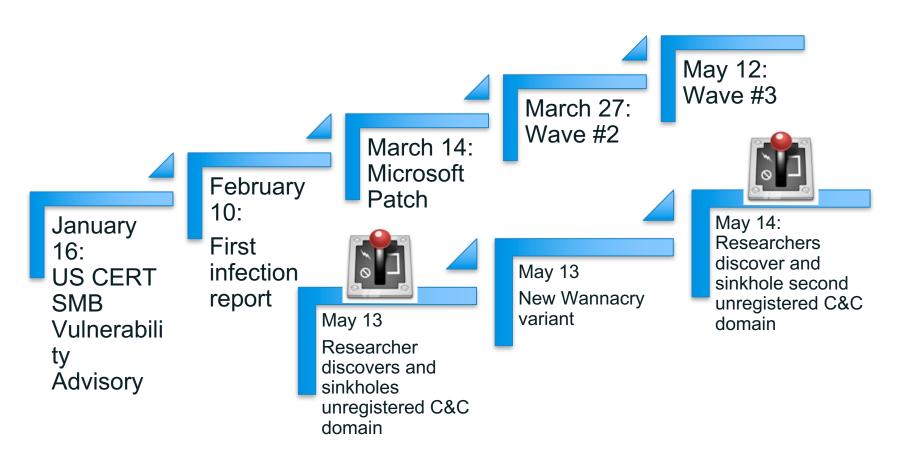



Kill Switch?

- Malware author may have outwitted himself while attempting to protect code against analysis
 - Intention was to have malware detect sandbox (analysis)
 - Instead, malware on infected computers attempted to connect to Command-Control server
- By registering the domains for sinkholing purposes, the researcher "unknowingly killed the malware"
 - https://www.malwaretech.com/2017/05/how-toaccidentally-stop-a-global-cyber-attacks.html

IF my ransomware fails to connect to the C2 then it's safe to *encrypt* the victim system

ELSE IF

my ransomware does connect to the C2 then exit process to avoid analysis

That's right... I think... yeah... Ok...



https://www.flickr.com/photos/striatic/



Agenda

- What is DNS Abuse? DNS Misuse?
- Examples of DNS Abuse or Misuse
- Evolving DNS Threat Landscape
- Abuse in an ICANN Context



DNS Abuse in the ICANN policy world



https://www.flickr.com/pnotos/mypublicjournal/

- ICANN discussions often touch on issues relating to "abuse"
 - Deliberations are often heated or controversial
- Topics with highest heat map at **ICANN 60**
 - Whois accuracy
 - GDPR
 - Public safety
 - Reporting abuse



Government Advisory Committee on DNS Abuse

Beijing GAC communique, April 2013

- Mitigating abusive activity—Registry operators will ensure that terms of use for registrants include prohibitions against the distribution of malware, operation of botnets, phishing, piracy, trademark or copyright infringement, fraudulent or deceptive practices, counterfeiting or otherwise engaging in activity contrary to applicable law.
 - https://www.icann.org/en/system/files/correspondence/gac-to-board-18apr13-en.pdf

Hyderabad GAC communique, November 2016

- The GAC would like to remind ICANN that the list of Security Threats in the New gTLD Safeguards is not meant to be exhaustive. In fact, the Security checks Safeguard applicable to all New gTLDs refers to "security threats such as phishing, pharming, malware, and botnets" (emphasis added), which does not exclude other relevant threats. Please describe what analysis and reporting is conducted regarding other relevant threats not listed above, including spam?
 - https://www.icann.org/en/system/files/correspondence/gac-to-icann-08nov16-en.pdf



Public Safety Working Group

- Working group reports to and advises GAC on matters of abuse, public safety or public interest policy
- Law enforcement and invited cybersecurity SMEs
- Issues that the PSWG considers
 - GDPR
 - Whois accuracy
 - Carrier Grade Network Address Translation (CGN)
 - Fast Flux
 - DNS Abuse



Consideration of DNS abuse in contractual agreements

Registry base agreement

Specification 6 (4):

 Abuse PoC, malicious use of orphan glue records

Specification 11 (3):

 Registry Operator agrees to perform the following specific public interest commitments...

https://www.icann.org/resources/pages/registries/registries-agreements-en

Registrar Accreditation Agreement (RAA13)

Section 3.18:

- Abuse Point of Contact,
- Duty to investigate reports of abuse: "reasonable and prompt steps to investigate and respond appropriately to any reports of abuse"
- Publish procedures for receipt, handling, and tracking of abuse reports

Section 2.2:

- Abuse/Infringement Point of Contact for Privacy/Proxy Provider
- Publish process or facilities to report abuse of a domain name registration managed by the P/P Provider
- https://www.icann.org/resources/pages/approved-with-specs-2013-09-17-en



DNS Abuse at ICANN 61

Sunday, March 11 • 11:30am

GAC PSWG Update

https://61.schedule.icann.org/meetings/647648

Tuesday, March 13 • 08:30am

GAC PSWG Meeting

https://61.schedule.icann.org/meetings/647662

GAC & PSWG: GDPR & Whois 9:30

https://61.schedule.icann.org/meetings/647663

Wednesday, March 14 • 08:30am

DNA Healthy Domains Initiative

https://61.schedule.icann.org/meetings/6447750



Engage with ICANN



Thank You and Questions

Visit **icann.org**Email: dave.piscitello@icann.org



@icann



facebook.com/icannorg



youtube.com/icannnews



flickr.com/icann



linkedin/company/icann



slideshare/icannpresentations



soundcloud/icann

